



Dart Aerospace Ltd.
1270 Aberdeen St
Hawkesbury, ON
K6A 1K7
Canada

Tel (613) 632-5200



D407-667-105TRN
Job Sheet 173569



Part No: D407-667-105TRN

Job Qty: 1 ea

Part Name: Crosstube Turning Detail



Part Weight: 0 lbs

Status: Scheduled

Priority: Medium

Job Created: 3/5/18

Job Tracking No:

Due Date: 3/23/18

Created By: Michelle Gagnon-Donovan

Type: Stock

Description:

Note: DWG REV C IPP Rev:a 08.02.28 new issue EC IPP Rev B 08.04.02 Removed polish EC verified by: DD

Ship Via:

Bill of Materials

Job Routing

Op No	Operation	Qty	Start Date	Due Date	Standard		Workcenter/Supplier		Sign-off
					Setup hrs	Run Hrs	Workcenter / Supplier	Lead Time	
90	Start up Operation	1 Ea	3/22/18	3/22/18	0.00	0.00	Start Up Crosstubes-2		M.D.
100	Mori Seiki	1 pcs	3/22/18	3/22/18	2.21	1.25	Mori Seiki TL-40		M.D.
110	QC	1 pcs	3/22/18	3/22/18	0.00	0.00	QC2-2		M.D.
120	Mori Seiki	1 pcs	3/22/18	3/22/18	0.00	1.12	Mori Seiki TL-40		M.D.
130	QC	1 pcs	3/22/18	3/22/18	0.00	0.00	QC2-2		M.D.
140	QC	1 pcs	3/22/18	3/22/18	0.00	0.00	QC8		GP
145	Crosstubes	1 pcs	3/22/18	3/22/18	0.00	0.36	Crosstubes-2		GP
150	HandFXtube	1 pcs	3/23/18	3/23/18	0.00	0.40	Crosstubes-3		GP
160	QC	1 pcs	3/23/18	3/23/18	0.00	0.00	QC7-3		GP
170	Packaging	1 pcs	3/23/18	3/23/18	0.00	0.00	Packaging3-2		GP
180	QC21-SA	1 Ea	3/23/18	3/23/18	0.00	0.00	QC21		GP

Part Op 100 - 1- Fill tube with sand & install plugs 407-105 on both ends as per Folio FA249 2- Turn both side of tube 3- Turn first Descriptions: taper section on both side as per folio FA249

120 - 1- Turn second taper on both side 4- Scribe part # and batch # using vibrating stylus on the cuff as per Dwg D407-667-145 5- Ultra sound the crosstube as per FAI. "wall thickness mesurment" at given location.

145 - GRIND ONLY TRANSITION LINES SMOOTH LONGITUDE WAY.

150 - 1- handfinish X-TUBE INSIDE AND OUT

170 - LOCATION : LG014

Job BOM

Part / Item	Component Name	Quantity	Operation	Container
D6010-115	Crosstube Material	1 Ea (1 ea)	90-Start up Operation	

B123975

Job Allocations

Operation	Component Part	Required	Inventory	Allocated
90-Start up Operation	D6010-115	1	123	0

Part Specifications

Specifications could not be found.

Plex 3/5/18 9:57 AM Dart.Gagnon.Michelle



DART Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
CANADA
TEL.: 1 613 632-5200
Email: sales@dartaero.com
www.dartaerospace.com

Container No: S085082



Part: D407-667-105TRN

Job No: 173569

Serial No/Batch: S085082

Revision:

Inspector:

Exp Date:

Instructions:


Date: 06/28/18

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE


WORK ORDER
NO. 173569

MAR 05 2018


UNDER REVIEW
CP 11/08/13
BOW 11.615
1.07.26

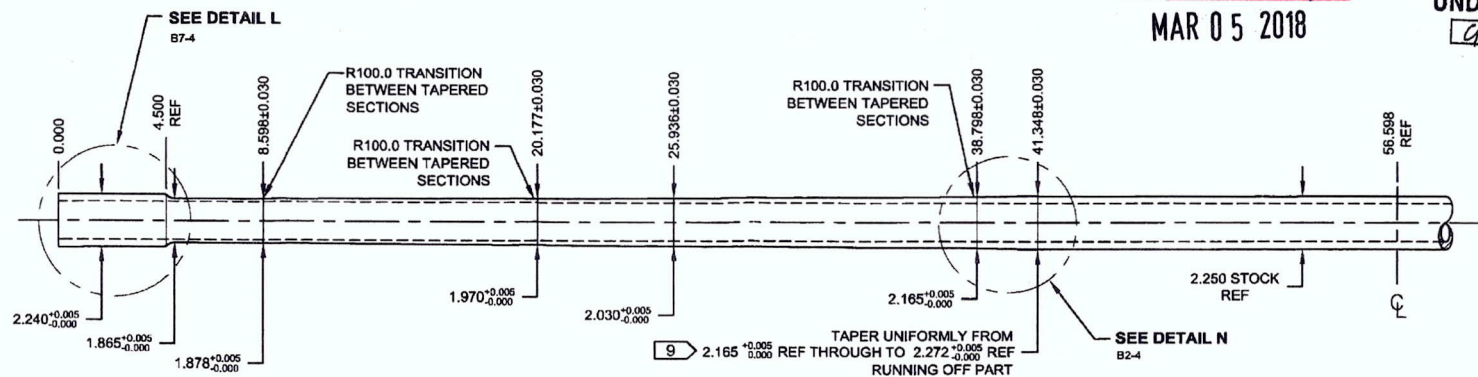


TURNING DETAIL

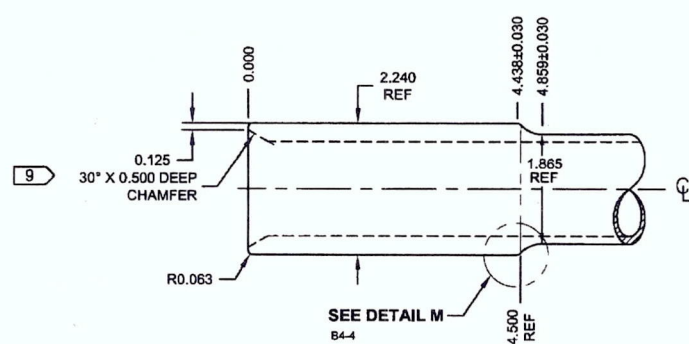

**DETAIL L:
CROSSTUBE CUFF**
D7-4 NOT TO SCALE



**DETAIL M:
CUFF TRANSITION**
D6-4 NOT TO SCALE

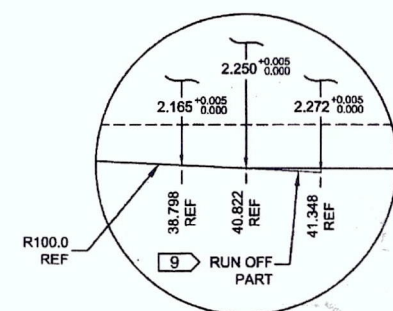

**DETAIL N:
TAPER RUN-OFF**
C3-4 NOT TO SCALE

DEO ATTACHED
RELEASED
08/11/13

DESIGN	CP	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED	CP	DRAWING NO.	REV. C
MFG. APPR.	CP	D407-667-145	SHEET 4 OF 4
APPROVED	CP	TITLE	SCALE
DE APPR.	CP	CROSSTUBE ASS'Y (407 HIGH FWD)	NTS
DATE	08.11.06	COPYRIGHT © 2002 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSES OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

DRAWING NO. D407-667-145	TITLE CROSSTUBE ASS'Y (407 HIGH FWD)	REV. C	DART AEROSPACE LTD ENGINEERING ORDER		D.E.O. NO. D407-667-145-C-1	SHEET NO. SHEET 1 OF 1	SCALE NTS
DRAWN QP	CHECKED ASS	MFG. APPR. IB	APPROVED WD		DE APPR. H		
DATE 11.07.15	DATE 11.07.22	DATE 11.07.22	DATE 11/07/22		DATE 11.07.21		

PURPOSE:

REPLACE MAGNOBOND WITH PROSEAL.

CHANGE:

IS:

Item	Qty -145	Part Number	Description
9	A/R	PROSEAL 890 B-2	SEALANT, AMS-S-8802 CLASS B-2

WAS:

9	A/R	MAGNOBOND 6398	ROCKWELL SPECIFICATION RBO-120-023 ADHESIVE (TEXTRON/BELL SPEC. 299-947-100, TYPE II, CLASS 2 ADHESIVE)
---	-----	----------------	---

NOTE 12 & 15, SHEET 1 IS AMENDED AS FOLLOWS:

IS:

- 12) TO INSTALL D2891-1 SUPPORT: ABRASE MATING SURFACE OF SUPPORT AND CROSSTUBE WITH 180-GRIT SANDPAPER AND REMOVE RESIDUE WITH MEK (OR EQUIVALENT). APPLY A 0.04" TO 0.07" THICK LAYER OF PROSEAL 890 CLASS B-2 (OR AMS-S-8802 CLASS B-2) SEALANT TO MATING SURFACE OF SUPPORT.
- 15) TORQUE CLAMPS 80 TO 100 IN-LB. ENSURE AT LEAST 1.5 THREADS SHOWING IN SAFETY AND THAT NUT HAS NOT BOTTOMED-OUT AFTER TORQUING. **PRIOR TO PACKAGING, RE-CHECK TORQUE ON CLAMPS AFTER PROSEAL 890 SEALANT HAS CURED FOR 72 HOURS.**

WAS:

- 12) INSTALL D2891-1 SUPPORT USING 0.03" TO 0.06" THICK LAYER OF MAGNOBOND 6398 PER QSI 015. LET CURE FOR 12 HOURS AFTER INSTALLATION AND PRIOR TO PACKAGING.
- 15) TORQUE CLAMPS 80 TO 100 IN-LB. ENSURE AT LEAST 1.5 THREADS SHOWING IN SAFETY AND THAT NUT HAS NOT BOTTOMED-OUT AFTER TORQUING.

RELEASED
2011-07-28
WD

DRAWING NO. D407-667-145	TITLE CROSSTUBE ASS'Y (407 HIGH FWD)	REV. C	DART AEROSPACE LTD ENGINEERING ORDER	D.E.O. NO. D407-667-145-C-2	SHEET NO. SHEET 1 OF 1	SCALE NTS
DRAWN AJS	CHECKED	MFG. APPR.	APPROVED	DE APPR.		
DATE 12.08.02	DATE 12.08.02	DATE 12.08.02	DATE 12.08.02	DATE 12.08.02	DATE 12.08.02	

PURPOSE:

ADD ELECTRICAL GROUNDING STRAP

CHANGE:

ITEM	QTY -145	PART NUMBER	DESCRIPTION
1	X	D407-667-145	CROSSTUBE ASSEMBLY (407 HIGH FWD)
10	2	AN742D36	CLAMP
11	2	MS9165-05	ANGLE BRACKET
12	2	MS21042L3	NUT (OR MS21042-3)
13	2	MS27039-1-08	SCREW
14	4	NAS1149C0332R	WASHER (OR AN960C10L)


ADD

GENERAL NOTES:


- 16) MASK AREA UNDER CLAMP PRIOR TO PAINTING
- 17) SEAL EDGES WHERE AN742D36 CLAMP MEETS WITH THE CROSSTUBE USING SIKAFLEX-241/-291 OR MIL-S-8802 CLASS B2 OR PROSEAL 890 SEALANT
- 18) PERFORM RESISTANCE CHECK TO ENSURE MAX RESISTANCE IS 10 MILLIOHMS

ADD

RELEASED
CP 12.08.17
ECN 12-631

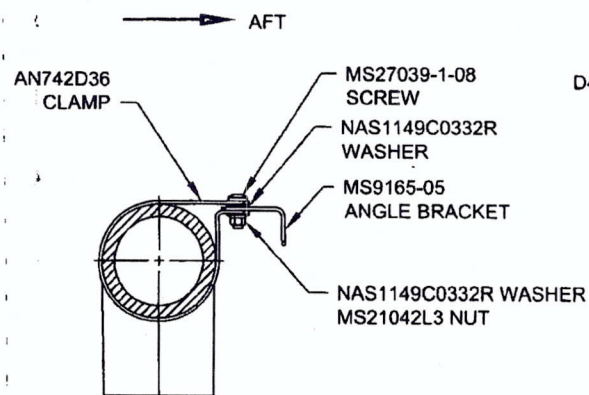

SECTION R-R

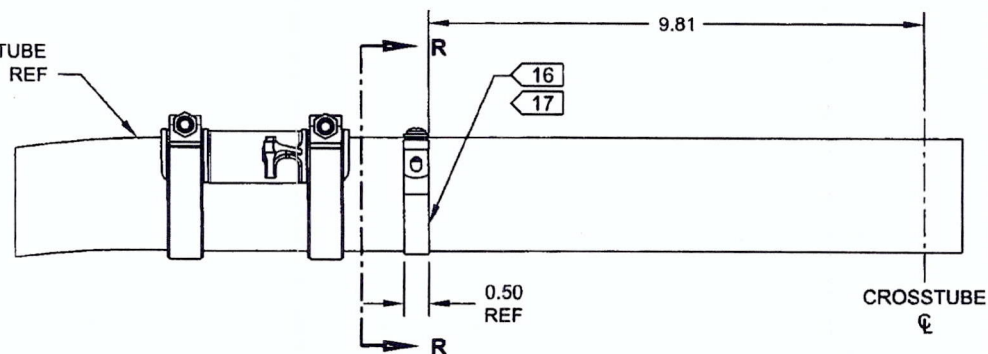

DETAIL P
BONDING STRAP INSTALLATION 2 PL

②


DART AEROSPACE LTD	Work Order:	173569
Description: Crosstube Assembly	Part Number:	D407-667-145
Inspection Dwg: D407-667-145 Rev: C		Page 1 of 2

FIRST ARTICLE INSPECTION CHECKLIST

	Inspection Sheet Drawing Dimension	Tolerance	Actual Dimension	Accept	Reject	Method of Inspection	Comments
SIDE A	2.240	+0.005/-0.000	2.243	✓		Vern 08	
	1.865	+0.005/-0.000	1.870	✓		"	
	1.878	+0.005/-0.000	1.883	✓		"	
	1.970	+0.005/-0.000	1.975	✓		"	
	2.030	+0.005/-0.000	2.035	✓		"	
	2.165	+0.005/-0.000	2.170	✓		BLM3"04	
	0.125	+/-0.010	.125	✓		Vern 08	
	R0.063	+/-0.010	.063	✓		RG	
	R0.500	+/-0.010	.500	✓		RG	
	R0.063	+/-0.010	.063	✓		RG	
	4.438	+/-0.030	4.439	✓		Vern 08	
SIDE B	2.240	+0.005/-0.000	2.243	✓		Vern 08	
	1.865	+0.005/-0.000	1.870	✓		"	
	1.878	+0.005/-0.000	1.883	✓		"	
	1.970	+0.005/-0.000	1.975	✓		"	
	2.030	+0.005/-0.000	2.035	✓		"	
	2.165	+0.005/-0.000	2.170	✓		BLM3"04	
	0.125	+/-0.010	.125	✓		Vern 08	
	R0.063	+/-0.010	.063	✓		RG	
	R0.500	+/-0.010	.500	✓		RG	
	R0.063	+/-0.010	.063	✓		RG	
	4.438	+/-0.030	4.439	✓		Vern 08	
	113.20	+/-0.020	113.20	✓		Tape	

DART AEROSPACE LTD	Work Order: 173569
Description: Crosstube Assembly	Part Number: D407-667-145
Inspection Dwg: D407-667-145 Rev: C	Page 2 of 2

WALL THICKNESS MEASUREMENT

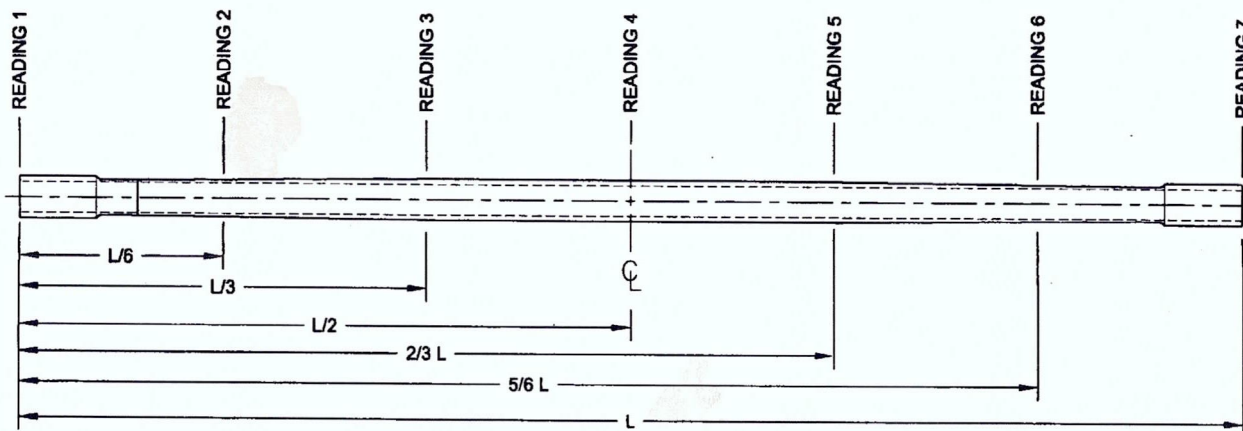

Location	WALL THICKNESS MEASUREMENT (IN)				Deviation Δw (max-min)	TOLERANCE
	w1	w2	w3	w4		
READING 1 L= 0"	.328	.315	.314	.325	.014	0.042"
READING 2 L= 18.867	.180	.176	.178	.184	.008	
READING 3 L= 37.734	.276	.274	.272	.276	.004	
READING 4 L= 56.700	.326	.327	.322	.321	.006	
READING 5 L= 75.467	.276	.279	.273	.272	.007	
READING 6 L= 94.333	.181	.184	.178	.177	.007	
READING 7 L= 113.20	.326	.313	.313	.324	.013	

Calibration Result

Actual Block Thickness: 100-500

Sitescan 250 Measured Thickness: 100-500

Measured by:	M.D. 56 9-89
Date:	2018-06-27

Audited by:	GP
Date:	18-03-07

Preliminary Approval:	
Date:	

Rev	Date	Change	Revised by	Approved
A	04.04.21	New Issue (P/O D407-667-105)	KJ/RF	
B	06.03.09	Dwg Rev updated	KJ/JLM	
C	09.06.11	Dwg Rev updated	KJ	
D	11.06.21	Tolerance revised for 4.438 dimension	KJ	
E	12.06.04	Wall thickness form added	KJ	